





LEGEND:

- 337.0 EXISTING CONTOURS
- 10.0 DESIGN CONTOURS (250mm INTERVALS)
- CUT-FILL DEPTH (H)
- DESIGN SURFACE LEVEL (DS)
- NATURAL SURFACE LEVEL (NS)
- DESIGN LEVELS
- G - GATE INLET
- IL - INVERT
- BL 356.80 LOT BENCH LEVEL
- DESIGN SURFACE LEVEL
- STORMWATER PIPE - RCP PIPE
- STORMWATER PIPE - UPVC PIPE
- FUTURE STORMWATER PIPE
- STORMWATER DRAINAGE PIT NUMBER
- MOUNTABLE KERB AND CHANNEL
- CONCRETE PATH WITH KERB RAMP
- SIDE ENTRY PIT (SEP)
- JUNCTION BOX (JB)
- GRATED INLET PIT (GIP)
- ALLOTMENT STORMWATER CONNECTION
- DRAINAGE OUTLET KERB INSERT
- SLEEPER RETAINING WALL
- TREE TO BE REMOVED
- TREE WITH TREE PROTECTION ZONE
- EXISTING TREE NUMBERS
- TRANSFORMER/SWITCHING CUBICLE EASEMENT
- OBSTRUCTION MARKER MOUNTED IN 44 GALLON DRUMS FILLED WITH SAND
- A.C. PAVEMENT TYPE 1
- LEVEL CUT FILL

- NOTES:**
- ALL DRAWINGS TO BE READ IN CONJUNCTION WITH THE LANDSCAPE ARCHITECTS DRAWINGS, OTHER CONSULTANTS DRAWINGS & THE SPECIFICATION.
 - ALL UPVC STORMWATER PIPES ARE TO BE SEWER CLASS 'SN8' U.N.O.
 - ALL R.C. STORMWATER PIPES ARE TO BE CLASS '2' WITH BEDDING TYPE 'HS2' U.N.O.
 - ALL EXISTING SERVICES ARE TO BE LOCATED BY THE CONTRACTOR PRIOR TO COMMENCEMENT OF WORK AT CONTRACTORS COST.
 - ALL ROAD BATTERS IN ALLOTMENTS TO BE LEVEL 1 CONTROL FILL.

I:\2016\161322-161400\161322 - Flaxley Residential Development - Stages 4&5\4-D\161322-402.dwg, A, 22/05/2020 1:23 PM, vClemmish

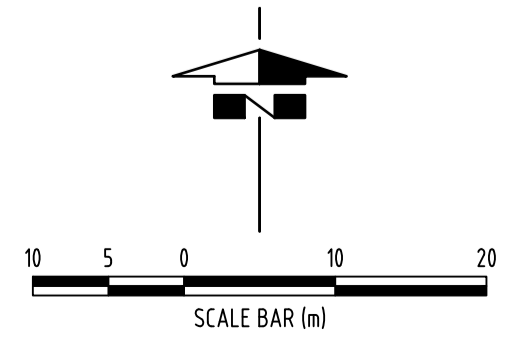

TENDER ISSUE
NOT FOR CONSTRUCTION

REV.	DATE	DESCRIPTION	DRAFT	ENG.	CHKD
A	22.05.20	TENDER ISSUE	VC	JB	

WGA
WALLBRIDGE GILBERT
AZTEC

60 Wyatt Street, Adelaide
South Australia 5000
Telephone 08 8223 7433
Email adelaide@wga.com.au

CLOVER PARK - STAGE 4
FLAXLEY ROAD, MOUNT BARKER
FOR LANSER COMMUNITIES
ROADS & STORMWATER PLAN

A1 DRAWING NUMBER
Job Number Sheet No. Rev.

Design MWRJ Drawn MWRJ
ADL161322 402 A